

LIQUIfit® Push-In Fittings

This "eco-designed" range proposes an **innovative alternative** for water applications; **no fluid contamination** occurs and **environmental protection is guaranteed**. These fittings ensure **reliable and compact** connections for **liquid transfer** applications.

Product Advantages

Innovative Technology & Concept	<ul style="list-style-type: none"> Ergonomic and aesthetic design The most compact product on the market for water, beverages and liquid foodstuffs Easy-to-clean external surfaces Push-in connection and disconnection Full flow Use with a pre-prepared metallic tubing Gripping system preventing any pumping effect Eco-designed (materials, manufacturing process, weight, dimensions and performance)
Optimal Performance	<ul style="list-style-type: none"> Patented sealing technology 100% leak-tested in production Date coding to guarantee quality and traceability Wide range of shapes and numerous configurations
High Performance Material	<ul style="list-style-type: none"> Bio-sourced polymer meeting the most severe food process regulations Suitable for contact with water and beverages Excellent chemical and mechanical resistance, even at high temperature Free of bisphenol A and phthalates, conforming with regulations



- Hot & Cold Drinks Dispensers
- Neutral Gases
- Cooling Systems
- Food Process
- Water Purification Systems
- Water Dispensers
- Medical


Applications

Technical Characteristics

Compatible Fluids	Water, beverages, CO ₂ (inert use) Chemical fluids: please consult us		
Working Pressure	Vacuum to 16 bar		
Working Temperature	-10°C to +95°C		
Tightening Torques (BSPT/NPTF)	Thread	1/8" and 1/4"	3/8" and 1/2"
	daN.m	0.15	0.30

Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.
Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

Component Materials

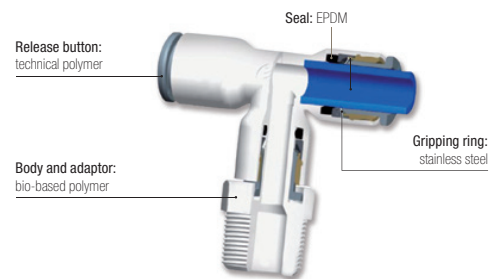

Silicone-free

Regulations

- | | |
|-----------------------------------|---------------------------|
| DI: 2002/95/EC (RoHS), 2011/65/EC | DM 174 |
| RG: 1935/2004/EC | KTW: fittings, on request |
| FDA: 21 CFR | WRAS |
| NSF 51 at 95°C | ACS |
| NSF/ANSI 61 - C HOT | |